

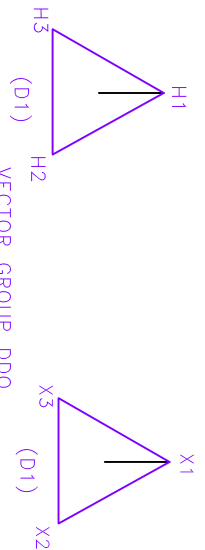


<input type="checkbox"/>	APPROVED
<input type="checkbox"/>	APPROVED WITH CHANGES
COMPANY/BY _____	
DATE _____	

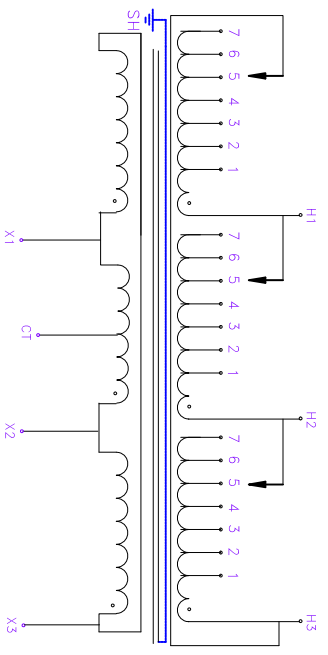

ENCLOSURE STYE: AIR COOLED, VENTILATED
 NEMA RATING: TYPE 3R
 WEIGHT (LBS): 340
 PRIMARY VOLTAGE: 480V DELTA 3P3W
 TAPS: 2-2.5% FCAN & 4-2.5% FCBN
 FREQUENCY: 60 HZ
 SECONDARY VOLTAGE: 240V DELTA CT
 KVA RATING: 30.0
 INSULATION CLASS: 220 °C
 MAX. AMB. TEMP: 40 °C
 TERMINATION: ALUMINUM BUS BAR
 EFFICIENCY: 98.23% (DOE10-II-D-431K (2016))
 IMPEDANCE: 3.00%
 SHIELD: ELECTROSTATIC SHIELD
 AGENCY APPROVALS: UL, cUL, RoHS

TITLE: **OUTLINE DRAWING FOR 30 KVA GENERAL PURPOSE TRANSFORMER**

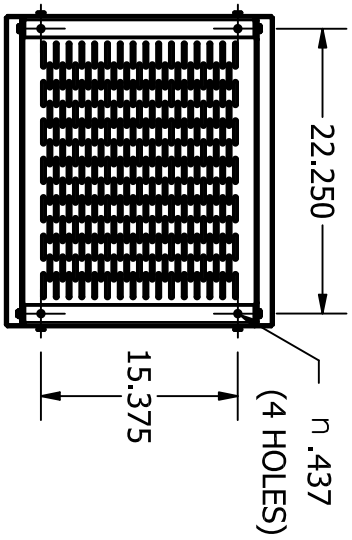

DONGNAN ELECTRIC MFG. CO.
 DETROIT, MI USA
 www.dongnan.com

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS A TOLERANCE IS NOTED NEXT TO THE DIMENSION

SCALE: **1/15**

REV C	REV A	REV D
REV B	REV A	REV D
REV E		

DRAWN BY	DATE CREATED	CKD BY
JL	11/14/2016	
PART NUMBER	DWG. NUMBER	
73-6230SH	OUT-9312	

REF: EN-801